




Since 1911
Measuring
Instruments

LEMAG®

Indicator Type 50-M3

- *robust*
- *precise*
- *reliable*
- *speed range up to 250 rpm*
- *type approved (GL)*
- *incl. ISO 9001 certificate*
- *advanced design*

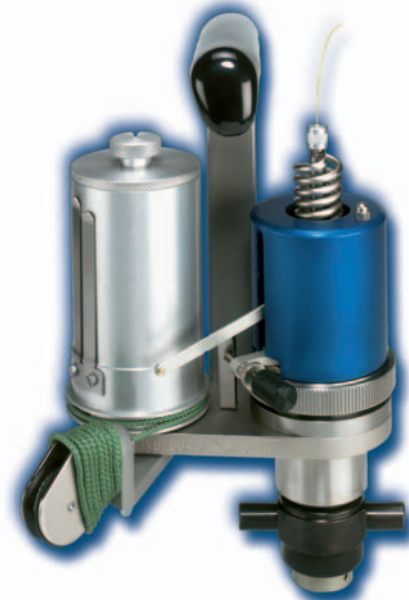

All models are fully type approved by Germanischer Lloyd (GL) & incl. ISO 9001 certificate

LEMAG® Indicator Type 50-M3 are the result of consequent redesign of the well known LEMAG® Indicator Type 50-M2 series.

They are for use and application to draw diagrams on slow speed Diesel-Engines (≤ 250 Rpm).

The LEMAG® Indicator Type 50-M3 is available for pressure ranges up to 300 bar. The pressure ranges are acc. to current latest engine developments.

New features:

- insulated grip-handle
 - fully protected writing system etc.
- based on our long experience & customer feedback.

Scope of supply is complete incl. all accessories delivered in a wooden instrument case.

Please not: This indicator is designed to take readings only of max. 30 sec. per single cylinder.

Spring schedule LEMAG® Indicator Type 50-M3

Piston	Spring-No.	Measuring range
1/5	1,2	40 bar
1/5	1,0	50 bar
1/5	0,8	60 bar
1/5	0,7	70 bar
1/5	0,6	80 bar
1/5	0,5	100 bar
1/5	0,4	125 bar
1/5	0,3	150 bar
1/5	0,25	180 bar

Other ranges on request available
Piston diameter 1/5 = 9,06 mm
Spring no. = scale in mm / 1 Bar

110/05/2005/E

Subject to change without notice



Sales & Service Center Rellingen
LEHMANN & MICHELS GmbH

Siemensstraße 9 · 25462 Rellingen · Germany

Tel. +49 4101 5880 0 · Fax +49 4101 5880 129 · www.lemag.de · lemag@lemag.de